

Modular junction box

320006



TRACELEC 
HEATING SOLUTIONS


1. DESCRIPTION



Modular junction box for installation in corrosive environments compatible with all types of self-regulating and constant power heating cables. It is approved for use in ordinary locations.

It is designed to connect to power network or to splice up to six (6) heating cables.

2. CONSTRUCTION

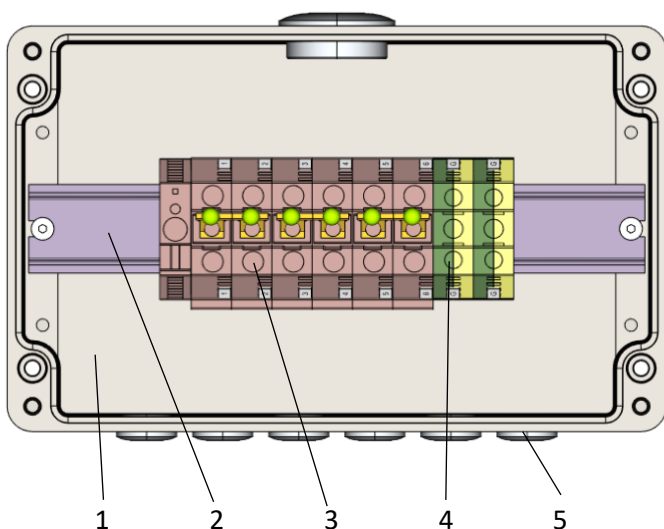

Components		
No.	Description	Amount
1	Enclosure	1
2	DIN-Rail	1
3	Power terminals	6
4	Earth terminals	2
5	ATEX plug	7





3. FEATURES

Corrosion and shock resistant, fiberglass reinforced polyester junction boxes are an excellent choice for electrical connections between heating cable and power cable, as well as for heating cable splicing.

Main features:

- Enclosure with stainless steel screws
- Mounting holes out of the gasket area
- Threaded holes for rails, mounting plates, and box entry glands.

4. SPECIFICATIONS


Description	Description
Entries	1 x M40 + 6 x M20
Max. operating voltage	690 V
Max. operating current	109 A
Ingress protection	IP66
Temperature range	-40 °C ~ 100 °C
Impact resistance	7 J
Flammability	UL 94, self-extinguishing
Material	Enclosure: Fiberglass reinforced polyester
	Gasket: Chloroprene
	Screws: Stainless Steel
Color	Silver gray (RAL 7001)
Terminal section	35 mm ²
Approvals	   
Classifications	ETIM 2.0 EC000058 ETIM 3.0 EC000058 UNSPSC 31-26-15-02 eClass 4.1 27-14-12-06 eClass 5.1 27-14-91-07 eClass 6.0 27-14-91-07 eClass 7.0 27-14-91-07
Certificates of compliance	MARITREG 09.04041.250 cULus E223801ROSE

320006

MODULAR JUNCTION BOX

TRACELEC
HEATING SOLUTIONS

5. HOLE LOCATIONS

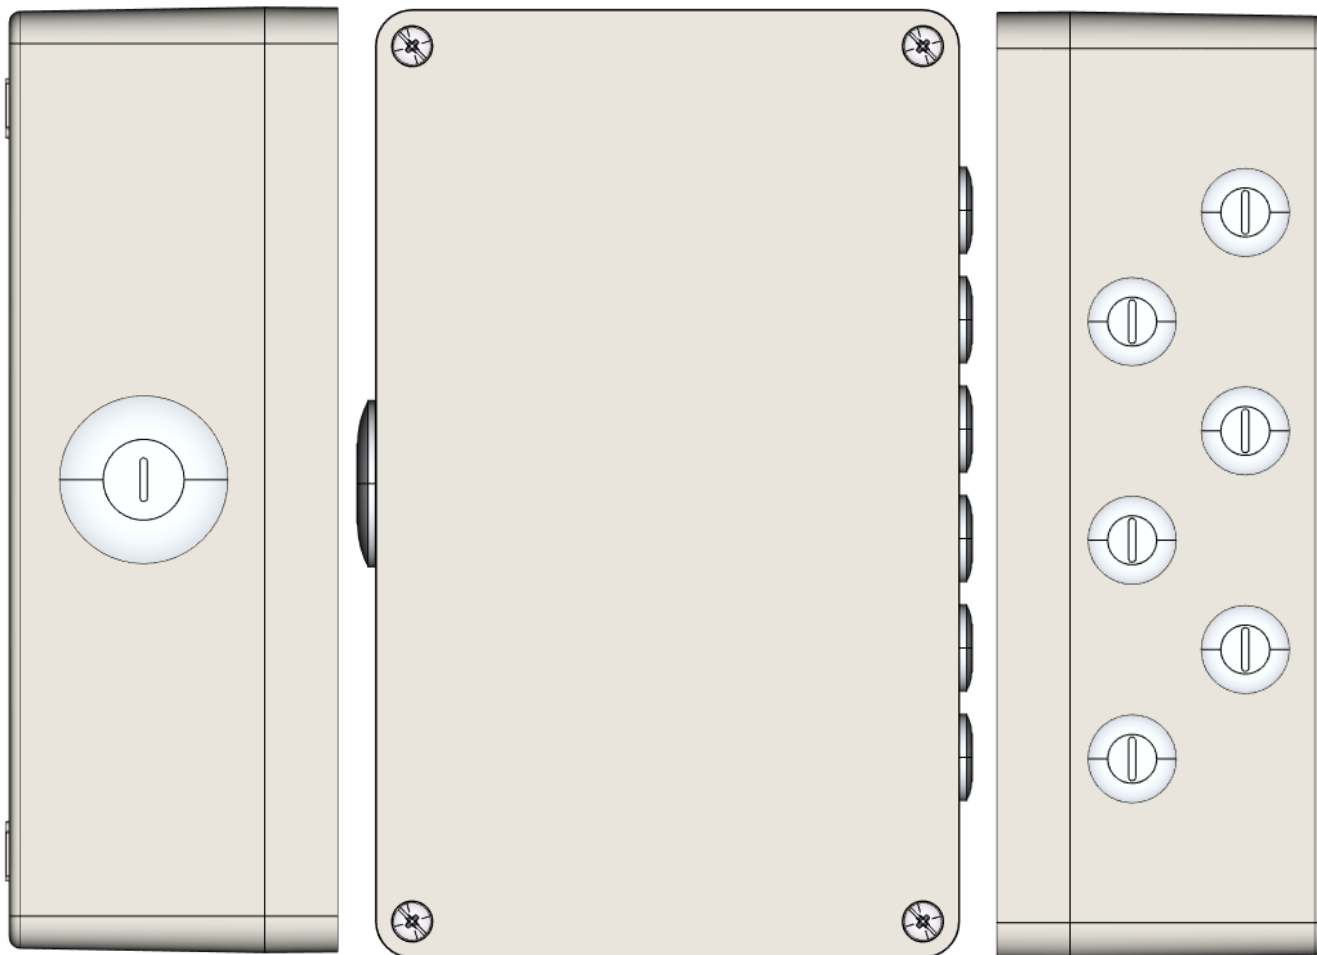

Side D (Right): 1xM40


Side C (Left): 6xM20

320006

MODULAR JUNCTION BOX

TRACELEC
HEATING SOLUTIONS

6. DIMENSIONS

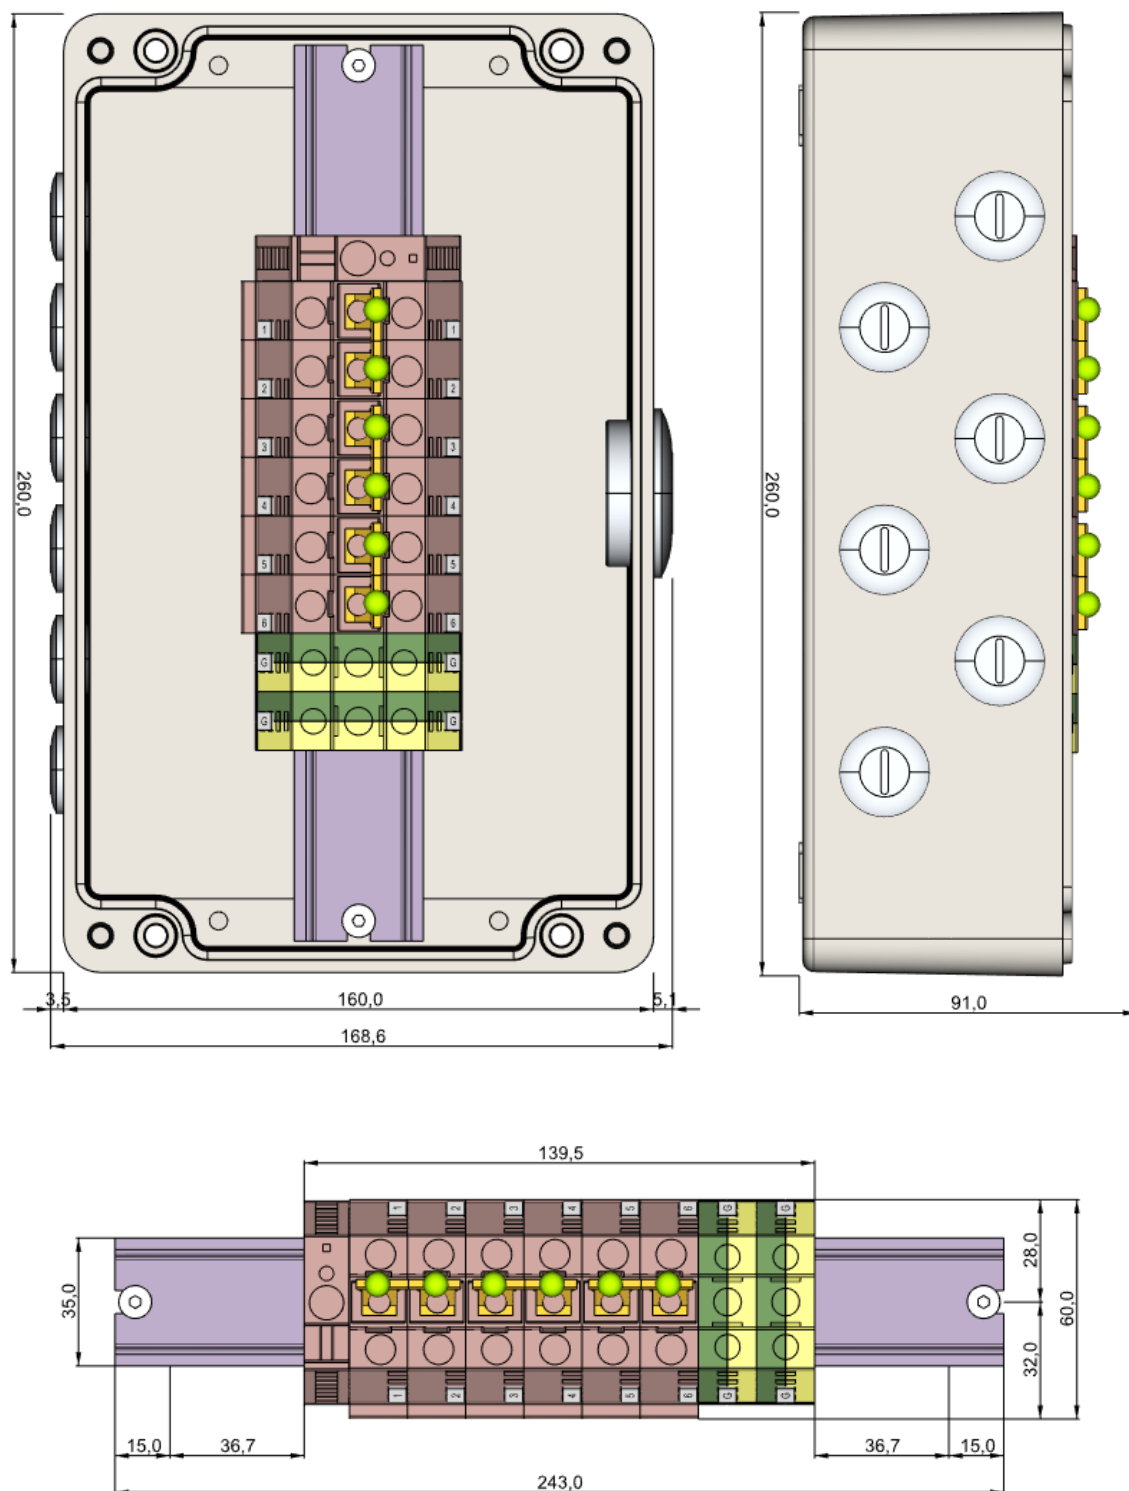

* Dimensions in mm.



TRACELEC

HEATING SOLUTIONS

c/ Josep V. Foix 10 · 43007 Tarragona · Spain
+34 977 290 039 · ofertas@tracelec.es
www.tracelec.es