






1. DESCRIPTION



Modular junction box for installation in corrosive environments compatible with all types of self-regulating heating cables. It is approved for use in ordinary and ATEX areas.

It is designed to connect to power network or to splice up to six (6) heating cables.

2. CONSTRUCTION

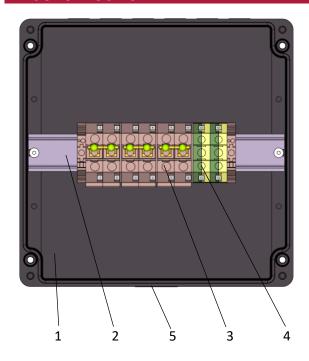

Componentes					
No.	Description	Amount			
1	Ex certified	1			
	enclosure				
2	DIN-Rail	1			
3	Power terminals	6			
4	Earth terminals	2			
5	ATEX plug	7			

3. FEATURES

Corrosion and shock resistant, fiberglass reinforced polyester junction boxes are an excellent choice for electrical connections between heating cable and power cable, as well as for heating cable splicing.

Main features:

- Enclosure with stainless steel screws
- Mounting holes out of the gasket area
- Threaded holes for rails, mounting plates, and box entry glands.

340006

MODULAR JUNCTION BOX



4. SPECIFICATIONS

Description	Data		
Entries	1 x M40 + 6 x M20		
Max. operating voltage	690 V		
Max. operating current	109 A		
Protection level	II 2G Ex eb IIC T6 Gb; II 2 D Ex tb IIIC Db		
Certificate no.	IBExU13ATEX1004X		
Ingress protection	IP66		
T-rating (Gas)	T6 (85 °C)		
Max. surface temperature	85° C		
Ambient temperature range	-20 °C ~ 40 °C		
Impact resistance	7 J		
Flammability	UL 94 V-0, self-extinguishing		
Material	Enclosure: Fiberglass reinforced polyester		
	Gasket: Silicone		
	Screws: Stainless Steel		
Color	Black (RAL 9011)		
Terminal section	35 mm ²		

Approvals



















Pag. 2 of 4


Classifications	ETIM 6.0	EC002503	ETIM 7.0	EC002503
	eClass 9.0	27-18-05-02	eClass 9.1	27-18-05-02
	eClass 10.0	27-18-05-02		


Doc. 320006-10-Rev.01 / 01-23



5. HOLE LOCATIONS




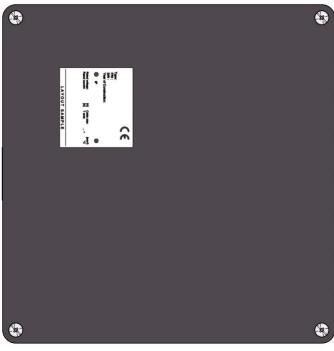


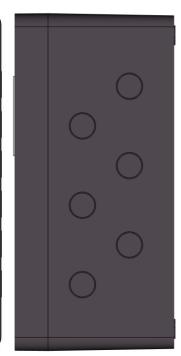

Side D (Right): 1xM40 Side C (Left): 6xM20

6. DIMENSIONS

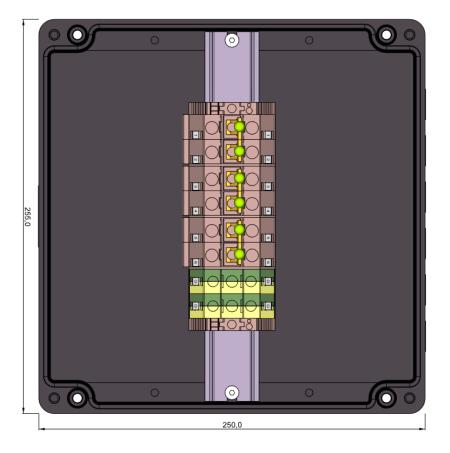


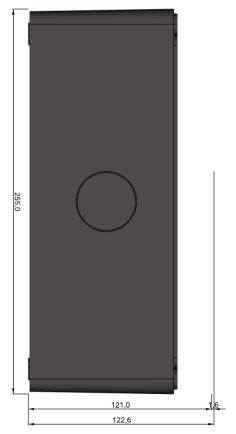

Doc. 320006-10-Rev.01 / 01-23 Pag. 3 of 4

340006MODULAR JUNCTION BOX



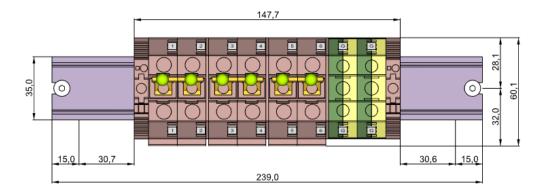

* Dimensions in mm.

Doc. 320006-10-Rev.01 / 01-23 Pag. 4 of 4



www.tracelec.es